

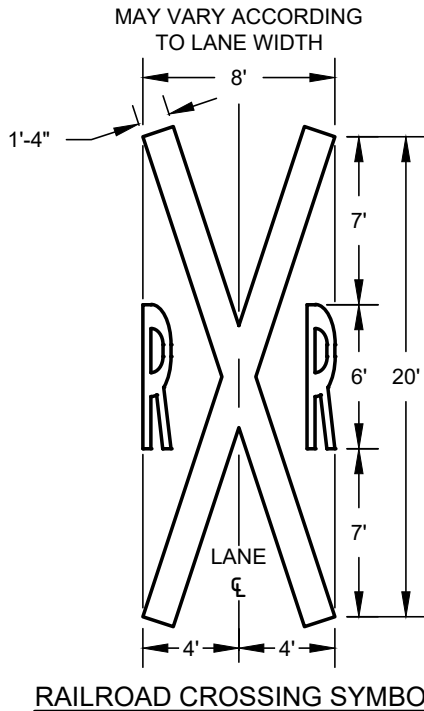
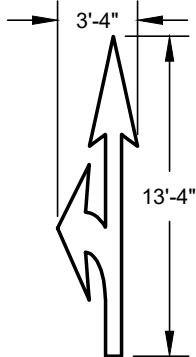



NOTES



1. Contractor will provide necessary control points to assist in preliminary spotting for stripe, stop line, legends, crosswalks, traffic arrows and associated signs.
2. Typical letter width is 16". Typical letter spacing is 6". Letter stroke is 4".
3. Refer to WSDOT M24.40-02 for more specific traffic arrow dimensions.
4. Arrows shown may be mirrored about their centerline as applicable to design.
5. Unless otherwise specified, all markings shall be Type A (liquid hot applied/extruded) thermoplastic per WSDOT Standard Specifications.




RAILROAD CROSSING SYMBOL

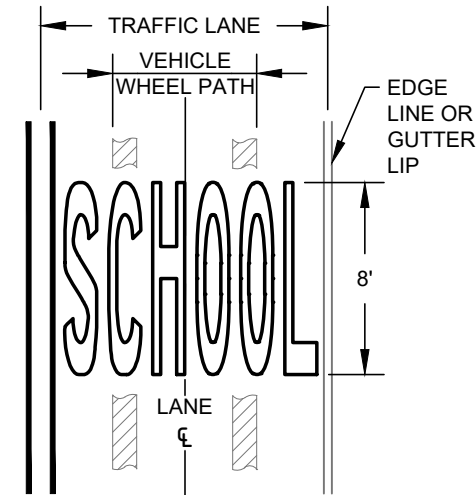


SINGLE-LANE LOCATIONS

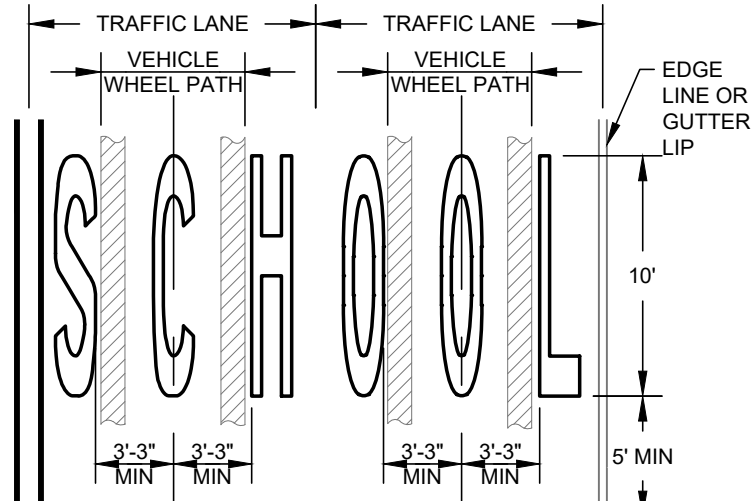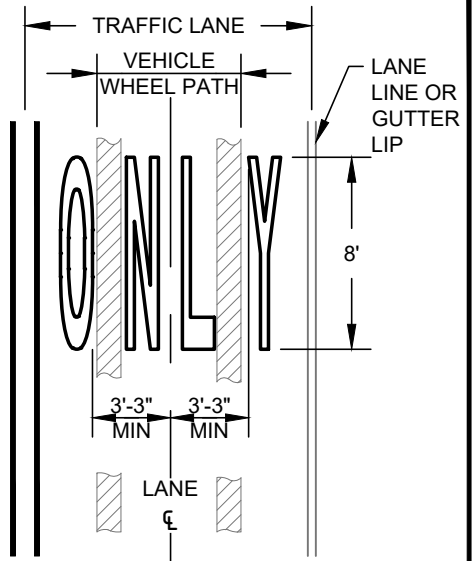

TWO-LANE LOCATIONS

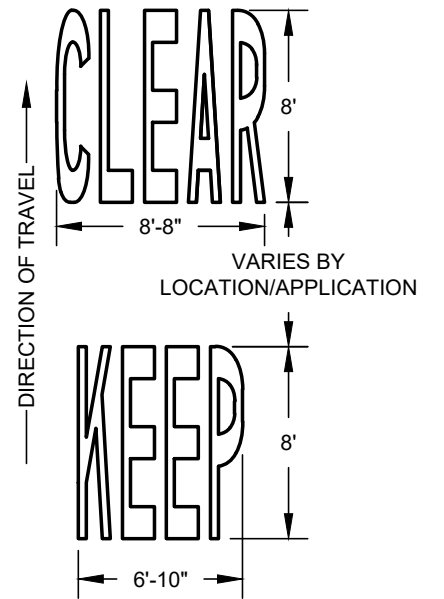

DS RVDR PUBLIC WORKS N/A TACOMA POWER	REVIEWED BY EW ENVIRONMENTAL SERVICES N/A TACOMA WATER
--	---



APPROVED FOR PUBLICATION

DocuSigned by:
[Signature]
CITY ENGINEER
66A2DE3FB2E238E...

12/19/2022
DATE

CITY OF TACOMA

PAVEMENT WORDS AND ARROWS

STANDARD PLAN NO. CH-10